




PERMA PIAZZA

PERMEABLE PAVER

Perma Piazza is the latest ADA compliant permeable paver created by Rinox. When installed with free draining aggregate in the paver joints, Perma Piazza allows large volumes of storm water to pass directly through, reducing storm water pollutants and storm water infrastructure needs and associated costs. It is uniquely cast in a herringbone pattern on each pallet layer, which allows for efficient mechanical installation.



Specifications



A - 3^{1/8} x 4 x 8"



B - 3^{1/8} x 4 x 4"

Product Data

Pallet Information

	SQ.FT. PER PALLET	LAYERS PER PALLET	SQ.FT. PER LAYER	WT. PER PALLET	PCS. PER SQ.FT.	PCS. PER PALLET
A-Unit Only	80	8	10	3225	4.5	360
A & B Units	88	8	11	3475	n/a	n/a

The included "B" unit can be used as an edger or special ordered to be removed for mechanical installations.

Average Permeability Rates*

RATE (Inches/ Hour)	CAPACITY (Gallons/ Minute)	CAPACITY (Gallons/ Hour)
937.29	8.28	496.61

**Paver permeability is dependent upon subsurface conditions, i.e. soil, permeability rates, subbase storage, etc.*

Applications

- Overflow or marginal parking areas
- Access roads adjacent to buildings
- Driveways
- Decrease stormwater system
- Emergency fire lanes
- Crossovers on medians
- Decrease retention/detention ponds
- Decrease impervious surface area on projects

Available Colors



MILTON GREY



ASH CHARCOAL




BURGUNDY WINE




PEARL
SPECIAL ORDER




Permeable Pavement with Partial/No Exfiltration to Soil Subgrade

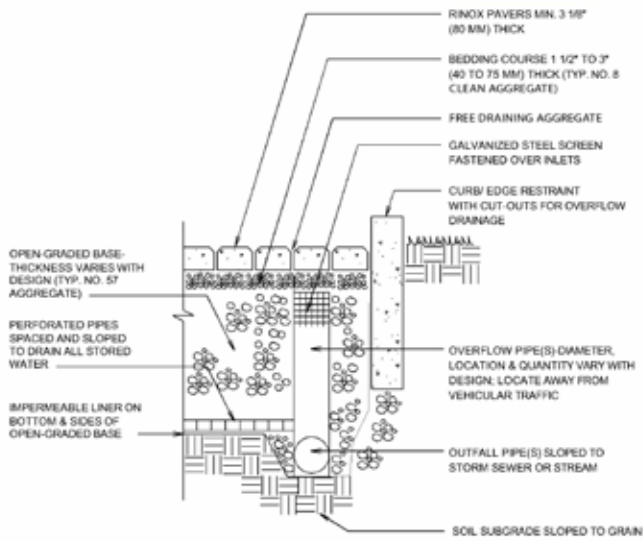

Mechanical Pattern

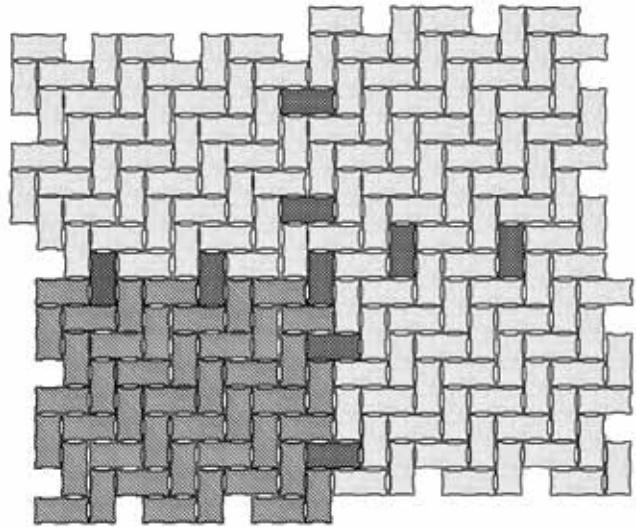

Permeable Pavement with Full Exfiltration to Soil Subgrade

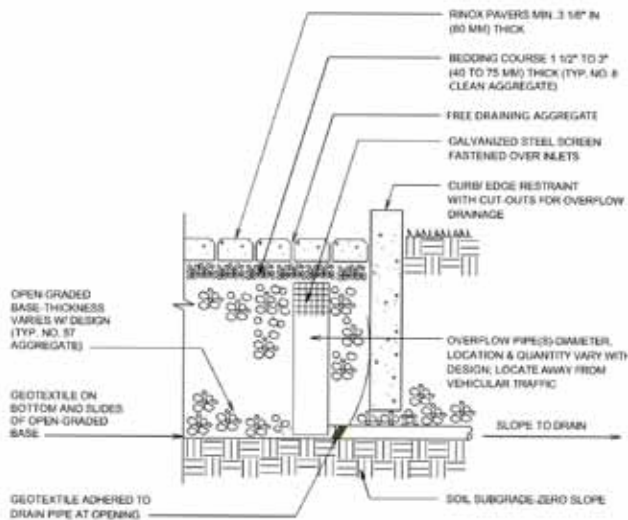

Pearl Perma Piazza pavers were used for these parking lines.