




Stripper for Solvent-based Sealants

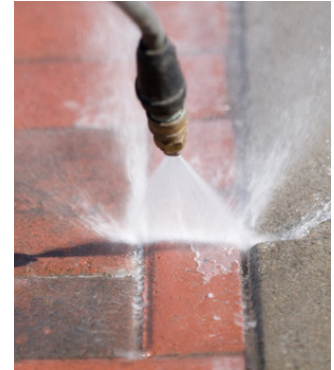

UPDATE

March 15, 2010

Make sure that you have an up-to-date technical data sheet in hand by consulting our Web site: techniseal.com

U.S.A. and Canada: dial 1 800 465-7325

Others: dial (514) 523-8324 (Canada)

APPLICATIONS

- Pavers and slabs made of concrete or natural stone, masonry, etc.
- Driveways, pool decks, patios, terraces, commercial parking lots, pedestrian areas, etc.

PROPERTIES

- Strips Techniseal Protectors as well as other solvent-based sealants on large surfaces.

DESCRIPTION

STRIPPER FOR SOLVENT-BASED SEALANTS effectively dissolves solvent-based sealants, paints on large surfaces. It works and evaporates slowly, making stripping of large surfaces much easier, especially when the ground is hot. Its emulsifying additives make it easy to rinse with a pressure washer.

Note: For stripping water-based Protectors, use the Stripper for Water-based Sealants, product 221-647.

DIRECTIONS

Wear adequate protective clothing. To ensure the results will meet your expectations, always test the product on a small hidden area of approximately 4 sq. ft. Do not thin or dilute.

APPLICATION:

It is preferable to strip on a cloudy day to prevent the stripper from drying to quickly on the surface. Start from the highest point. Work on 100 sq ft areas.

- 1) Spread the product on the surface with a solvent-resistant hard bristle long handle brush.
- 2) Let the product work from 30 minutes to 4 hours.

Important: DO NOT let the product dry on the surface. If product starts to dry, apply more product and scrub to re-activate it.

- 3) Using a pressure washer and a 25° tip, remove the sealant, inch by inch. It should peel-off like dead skin.

Tip: The use of a hot water pressure washer will make the process much easier.

WARNING:

THE STRIPPER IS VERY POWERFUL. PROTECT YOURSELF BY WEARING SAFETY GLASSES, GOLF SHOES WITH METAL CLEATS. THE PRODUCT WILL DISSOLVE RUBBER AND WILL TURN THE SURFACE SLIPPERY. PROTECT THE AREA - GARAGE DOORS, FENCES, OUTDOOR FURNITURE ETC.

COVERAGE

Strips from 140 to 200 sq. ft. The quantity required depends on the type and quantity of product to be stripped. It is recommended that a small area be tested to determine the exact amount needed.

STORAGE and SHELF LIFE

Product must be kept in its original, unopened and tightly sealed container and stored in a dry and well ventilated place with controlled temperature (40°F to 75°F). Keep sheltered from weather and direct sunlight. Properly stored, the product’s shelf life is 3 years following production (see date on packaging).

PACKAGING

Product Code	Retail Size	Pro Size	Units per box	Units per pallet
221-547		5 gal.	—	—

WARNING

COMBUSTIBLE LIQUID AND VAPOR. CAUSES RESPIRATORY TRACT, EYE AND SKIN IRRITATION. CONTAINS MATERIAL THAT CAN CAUSE TARGET ORGAN DAMAGE. DEVELOPMENTAL HAZARD - CAN CAUSE ADVERSE DEVELOPMENTAL EFFECTS. **KEEP OUT OF REACH OF CHILDREN.**

FOR MORE INFORMATION, CONSULT THE MATERIAL SAFETY DATA SHEET.

SHIPPING

INFORMATION MANQUANTE

LIMITED WARRANTY

Manufacturer, having no control over the use of the materials, does not guarantee finished work. Replacement of any defective product shall be the buyer’s sole remedy under this warranty. A proof of purchase will be required for any claim. Before using this product, user shall determine the suitability of the product for its intended use and user alone assumes all risks and liability whatsoever in connection therewith. User shall test product in a small inconspicuous area (approx. 4 sq. ft.) under projected conditions of use. In the event that no test was carried out, the warranty will only apply to 4 sq.ft. (0.4 m²). This limited warranty excludes any liability for any consequential, incidental, indirect or special damages. Except for the limited warranty made above, manufacturer specifically disclaims and excludes any other express warranty, any implied warranty of merchantability of goods and implied warranty of fitness of goods for any particular purpose.